



**Acrux**



Product Code	Power Consumption (W)	Output Lumen (lm)	Correlated Color Temperature (CCT)	Color Rendering Index (CRI)
YL-SPT-3-5	5	625	3000K / 4000K / 6500K	Min. 80
YL-SPT-3-6	6	750	3000K / 4000K / 6500K	Min. 80
YL-SPT-3-8	8	1000	3000K / 4000K / 6500K	Min. 80
YL-SPT-3-12	12	1500	3000K / 4000K / 6500K	Min. 80
YL-SPT-3-20	20	2500	3000K / 4000K / 6500K	Min. 80
YL-SPT-3-25	25	3125	3000K / 4000K / 6500K	Min. 80



**Nominal Voltage** 220-240 VAC  
**Body Materials** Aluminum  
**Optics** PMMA Diffuser  
**Led Options** Osram, Seoul, Samsung  
**Class** II  
**Ingress Protection** IP40 - IP65  
**Optional** Dimmer, DALI, Emergency Kit, Separately Mounted Sensor

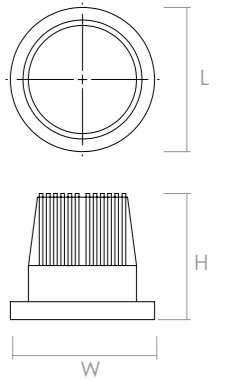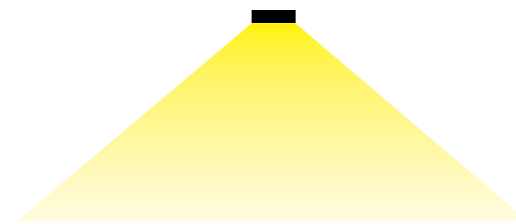

Product Code / Dimension (mm)	L	W	H	Weight (gr)	Cut Out
YL-SPT-3-5	80	80	70	150	70
YL-SPT-3-6	108	108	70	280	90
YL-SPT-3-8	120	120	55	300	105
YL-SPT-3-12	150	150	58	360	130
YL-SPT-3-20	200	200	58	470	180
YL-SPT-3-25	240	240	58	660	210