



Denep

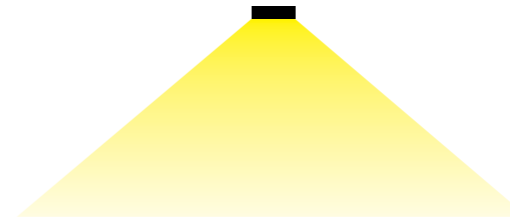

Nominal Voltage 220-240 VAC
Body Materials Aluminum
Optics PMMA Diffuser
Led Options Osram, Cree, Citizen
Class II
Ingress Protection IP40 - IP65
Optional Dimmer, DALI, Emergency Kit, Separately Mounted Sensor

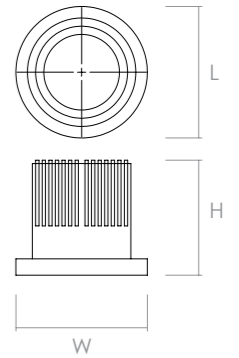

Product Code	Power Consumption (W)	Output Lumen (lm)	Correlated Color Temperature (CCT)	Color Rendering Index (CRI)
YL-SPT-5-6	6	750	3000K / 4000K / 6500K	Min. 80
YL-SPT-5-9	9	1125	3000K / 4000K / 6500K	Min. 80
YL-SPT-5-12	12	1500	3000K / 4000K / 6500K	Min. 80
YL-SPT-5-18	18	2250	3000K / 4000K / 6500K	Min. 80
YL-SPT-5-25	25	3125	3000K / 4000K / 6500K	Min. 80
YL-SPT-5-12D	12	1500	3000K / 4000K / 6500K	Min. 80
YL-SPT-5-18D	18	2250	3000K / 4000K / 6500K	Min. 80
YL-SPT-5-24D	24	3000	3000K / 4000K / 6500K	Min. 80
YL-SPT-5-36D	36	4500	3000K / 4000K / 6500K	Min. 80
YL-SPT-5-50D	50	6250	3000K / 4000K / 6500K	Min. 80

Product Code / Dimension (mm)	L	W	H	Weight (gr)	Cut Out
YL-SPT-5-6	80	80	70	150	70
YL-SPT-5-9	108	108	70	280	90
YL-SPT-5-12	120	120	55	300	105
YL-SPT-5-18	150	150	58	360	130
YL-SPT-5-25	200	200	58	470	180
YL-SPT-5-12D	194	97	70	720	2*85
YL-SPT-5-18D	234	117	70	780	2*105
YL-SPT-5-24D	294	147	75	990	2*130
YL-SPT-5-36D	350	175	85	1300	2*160
YL-SPT-5-50D	384	192	85	1450	2*175