



**Ascella**

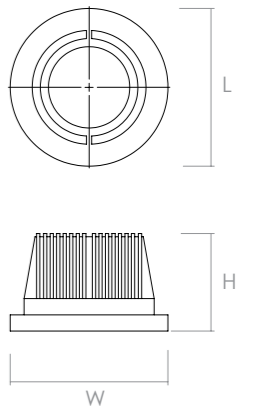

**Nominal Voltage** 220-240 VAC  
**Body Materials** Aluminum  
**Optics** PMMA Diffuser  
**Led Options** Osram, Seoul, Samsung  
**Class** II  
**Ingress Protection** IP40 - IP65  
**Optional** Dimmer, DALI, Emergency Kit, Separately Mounted Sensor

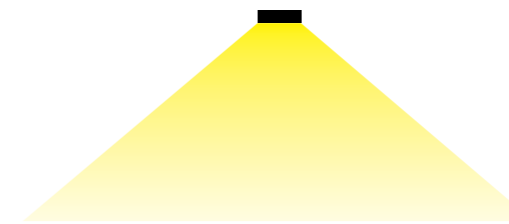

Product Code	Power Consumption (W)	Output Lumen (lm)	Correlated Color Temperature (CCT)	Color Rendering Index (CRI)
YL-SPT-6-4	6	750	3000K / 4000K / 6500K	Min. 80
YL-SPT-6-6	6	750	3000K / 4000K / 6500K	Min. 80
YL-SPT-6-8	8	1000	3000K / 4000K / 6500K	Min. 80
YL-SPT-6-12	12	1500	3000K / 4000K / 6500K	Min. 80

Product Code / Dimension (mm)	L	W	H	Weight (gr)	Cut Out
YL-SPT-6-4	97	97	60	250	85
YL-SPT-6-6	117	117	48	300	105
YL-SPT-6-8	147	147	55	400	130
YL-SPT-6-12	175	175	55	500	160