



Algol

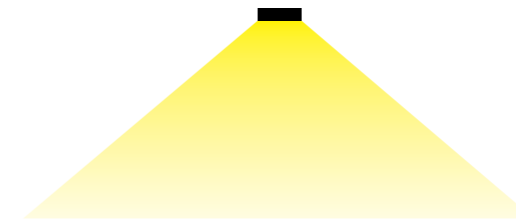

Nominal Voltage 220-240 VAC
Body Materials Aluminum
Optics PMMA Diffuser
Led Options Osram, Seul, Samsung
Class II
Ingress Protection IP40 - IP65
Optional Dimmer, DALI, Emergency Kit, Separately Mounted Sensor



Product Code	Power Consumption (W)	Output Lumen (lm)	Correlated Color Temperature (CCT)	Color Rendering Index (CRI)
YL-SPT-9-4	6	750	3000K / 4000K / 6500K	Min. 80
YL-SPT-9-6	6	750	3000K / 4000K / 6500K	Min. 80
YL-SPT-9-8	8	1000	3000K / 4000K / 6500K	Min. 80
YL-SPT-9-12	12	1500	3000K / 4000K / 6500K	Min. 80
YL-SPT-9-15	16	2000	3000K / 4000K / 6500K	Min. 80
YL-SPT-9-25	25	3125	3000K / 4000K / 6500K	Min. 80
YL-SPT-9-12D	12	1500	3000K / 4000K / 6500K	Min. 80
YL-SPT-9-16D	16	2000	3000K / 4000K / 6500K	Min. 80
YL-SPT-9-24	24	3000	3000K / 4000K / 6500K	Min. 80
YL-SPT-9-32	32	4000	3000K / 4000K / 6500K	Min. 80
YL-SPT-9-40	40	5000	3000K / 4000K / 6500K	Min. 80

Product Code / Dimension (mm)	L	W	H	Weight (gr)	Cut Out
YL-SPT-9-4	97	97	70	380	85
YL-SPT-9-6	117	117	70	400	105
YL-SPT-9-8	147	147	75	520	130
YL-SPT-9-12	175	175	85	670	160
YL-SPT-9-15	192	192	85	770	175
YL-SPT-9-25	227	227	85	1000	210
YL-SPT-9-12D	194	97	70	750	2*85
YL-SPT-9-16D	234	117	70	800	2*105
YL-SPT-9-24	294	147	75	1040	2*130
YL-SPT-9-32	350	175	75	1340	2*160
YL-SPT-9-40	384	192	75	1540	2*175