

Rastaban





QUALITY



Product Code	Power Consumption (W)	Output Lumen (lm)	Correlated Color Temperature (CCT)	Color Rendering Index (CRI)
YL-SPT-10-20	20	2500	3000K / 4000K / 6500K	Min. 80
YL-SPT-10-40	40	5000	3000K / 4000K / 6500K	Min. 80
YL-SPT-10-60	60	7500	3000K / 4000K / 6500K	Min. 80



Nominal Voltage	220-240 VAC
Body Materials	Aluminum
Optics	PMMA Diffuser
Led Options	Osram, Seul, Samsung
Class	II
Ingress Protection	IP40 - IP65
Optional	Dimmer, DALI, Emergency Kit, Separately Mounted Sensor

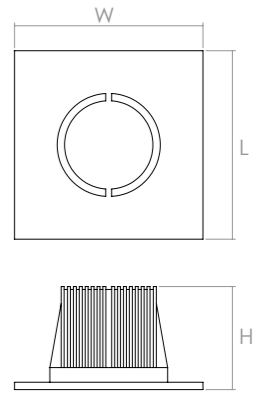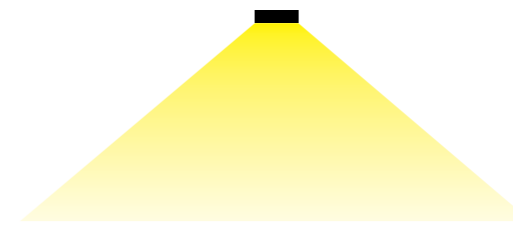

Product Code / Dimension (mm)	L	W	H	Weight (gr)	Cut Out
YL-SPT-10-20	195	195	100	1310	165*165
YL-SPT-10-40	350	195	100	1910	165*320
YL-SPT-10-60	520	195	100	2820	165*485