



Flare



Product Code	Power Consumption (W)	Output Lumen (lm)	Correlated Color Temperature (CCT)	Color Rendering Index (CRI)
YL-RSA-20	17	2125	3000K / 4000K / 6500K	Min. 80
YL-RSA-23-6	6	750	3000K / 4000K / 6500K	Min. 80
YL-RSA-23-8	8	1000	3000K / 4000K / 6500K	Min. 80
YL-RSA-23-12	12	1500	3000K / 4000K / 6500K	Min. 80
YL-RSA-23-16	16	2000	3000K / 4000K / 6500K	Min. 80
YL-RSA-23-20	20	2500	3000K / 4000K / 6500K	Min. 80
YL-RSA-23-25	25	3125	3000K / 4000K / 6500K	Min. 80



Nominal Voltage 220-240 VAC
Body Materials Aluminum
Optics PMMA Diffuser
Led Options Osram, Seoul, Samsung
Class I
Ingress Protection IP40
Optional Dimmer, DALI, Emergency Kit, Separately Mounted Sensor

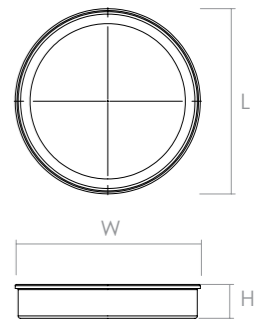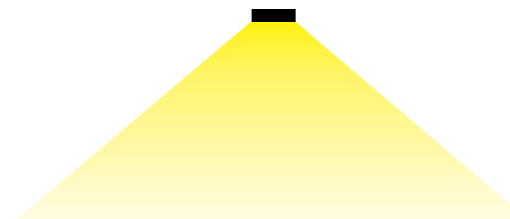

Product Code / Dimension (mm)	L	W	H	Weight (gr)
YL-RSA-20	465	465	85	1250
YL-RSA-23-6	100	100	85	480
YL-RSA-23-8	120	120	85	560
YL-RSA-23-12	150	150	85	680
YL-RSA-23-16	180	180	85	750
YL-RSA-23-20	200	200	85	900
YL-RSA-23-25	230	230	85	1050