



Nunki

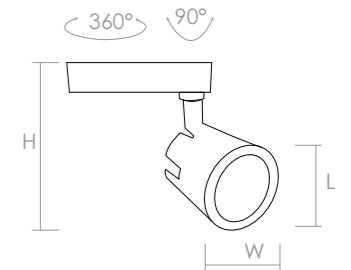

Nominal Voltage 220-240 VAC
Body Materials Aluminum
Optics PMMA Diffuser
Led Options Osram, Cree, Citizen
Class I
Ingress Protection IP40
Optional Dimmer, DALI

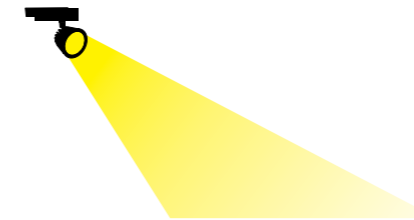

Product Code	Power Consumption (W)	Output Lumen (lm)	Correlated Color Temperature (CCT)	Color Rendering Index (CRI)
YL-RSPT-5-20	20	2500	3000K / 4000K / 6500K	Min. 80
YL-RSPT-5-30	30	3750	3000K / 4000K / 6500K	Min. 80
YL-RSPT-5-40	40	5000	3000K / 4000K / 6500K	Min. 80

Product Code / Dimension (mm)	L	W	H	Weight (gr)
YL-RSPT-5-20	90	90	125	1260
YL-RSPT-5-30	90	90	125	1260
YL-RSPT-5-40	90	90	125	1260