



## Pillar Series



Product Code	Power Consumption (W)	Output Lumen (lm)	Correlated Color Temperature (CCT)	Color Rendering Index (CRI)
YL-SKT-056	17	2040	3000K / 4000K / 6500K	Min. 80
YL-SKT-112	35	4200	3000K / 4000K / 6500K	Min. 80
YL-SKT-168	51	6600	3000K / 4000K / 6500K	Min. 80

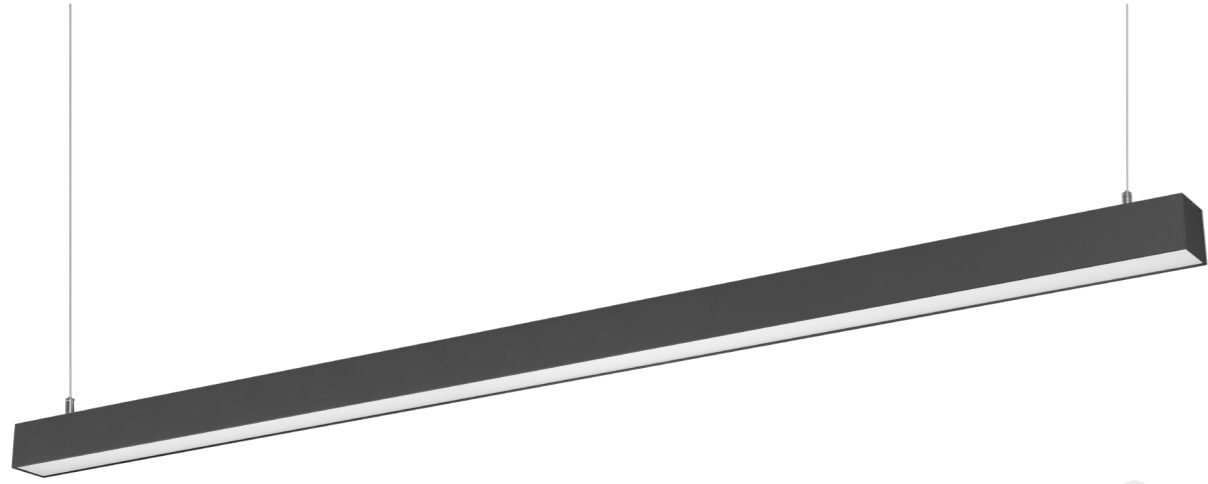

<b>Nominal Voltage</b>	220-240 VAC
<b>Body Materials</b>	Aluminum
<b>Optics</b>	PMMA Diffuser
<b>Led Options</b>	Osram, Seoul, Samsung
<b>Class</b>	I
<b>Ingress Protection</b>	IP40
<b>Optional</b>	Dimmer, DALI, Emergency Kit, Sensor

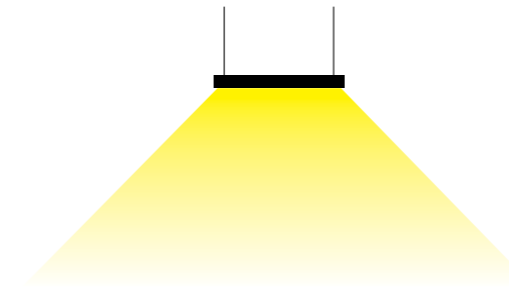

Product Code / Dimension (mm)	L	W	H	Weight (gr)
YL-SKT-056	600	55	75	1200
YL-SKT-112	1200	55	75	2450
YL-SKT-168	1500	55	75	3750