



Kobe

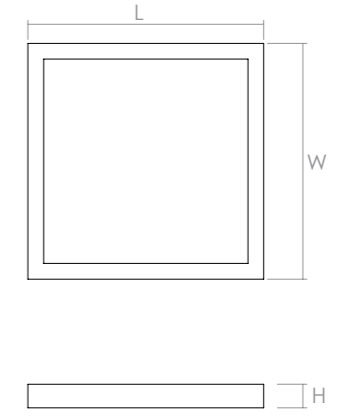

Nominal Voltage 220-240 VAC
Body Materials Aluminum
Optics PMMA Diffuser
Led Options Osram, Seoul, Samsung
Class I
Ingress Protection IP40
Optional Dimmer, DALI, Emergency Kit, Sensor

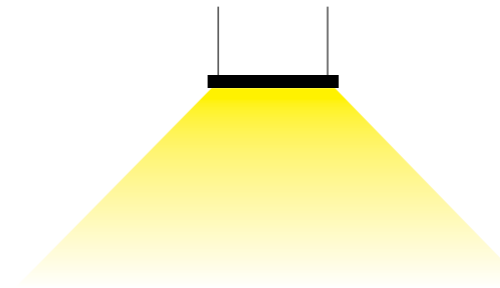

| Product Code | Power Consumption (W) | Output Lumen (lm) | Correlated Color Temperature (CCT) | Color Rendering Index (CRI) |
|--------------|-----------------------|-------------------|------------------------------------|-----------------------------|
| YL-SKT-4-80 | 80 | 8000 | 3000K / 4000K / 6500K | Min. 80 |
| YL-SKT-4-96 | 96 | 9600 | 3000K / 4000K / 6500K | Min. 80 |
| YL-SKT-4-128 | 128 | 12800 | 3000K / 4000K / 6500K | Min. 80 |
| YL-SKT-4-192 | 192 | 19200 | 3000K / 4000K / 6500K | Min. 80 |

| Product Code / Dimension (mm) | L | W | H | Weight (gr) |
|-------------------------------|------|------|----|-------------|
| YL-SKT-4-80 | 700 | 700 | 70 | 5500 |
| YL-SKT-4-96 | 850 | 850 | 70 | 8500 |
| YL-SKT-4-128 | 1250 | 1250 | 70 | 10500 |
| YL-SKT-4-192 | 1700 | 1700 | 70 | 12500 |