

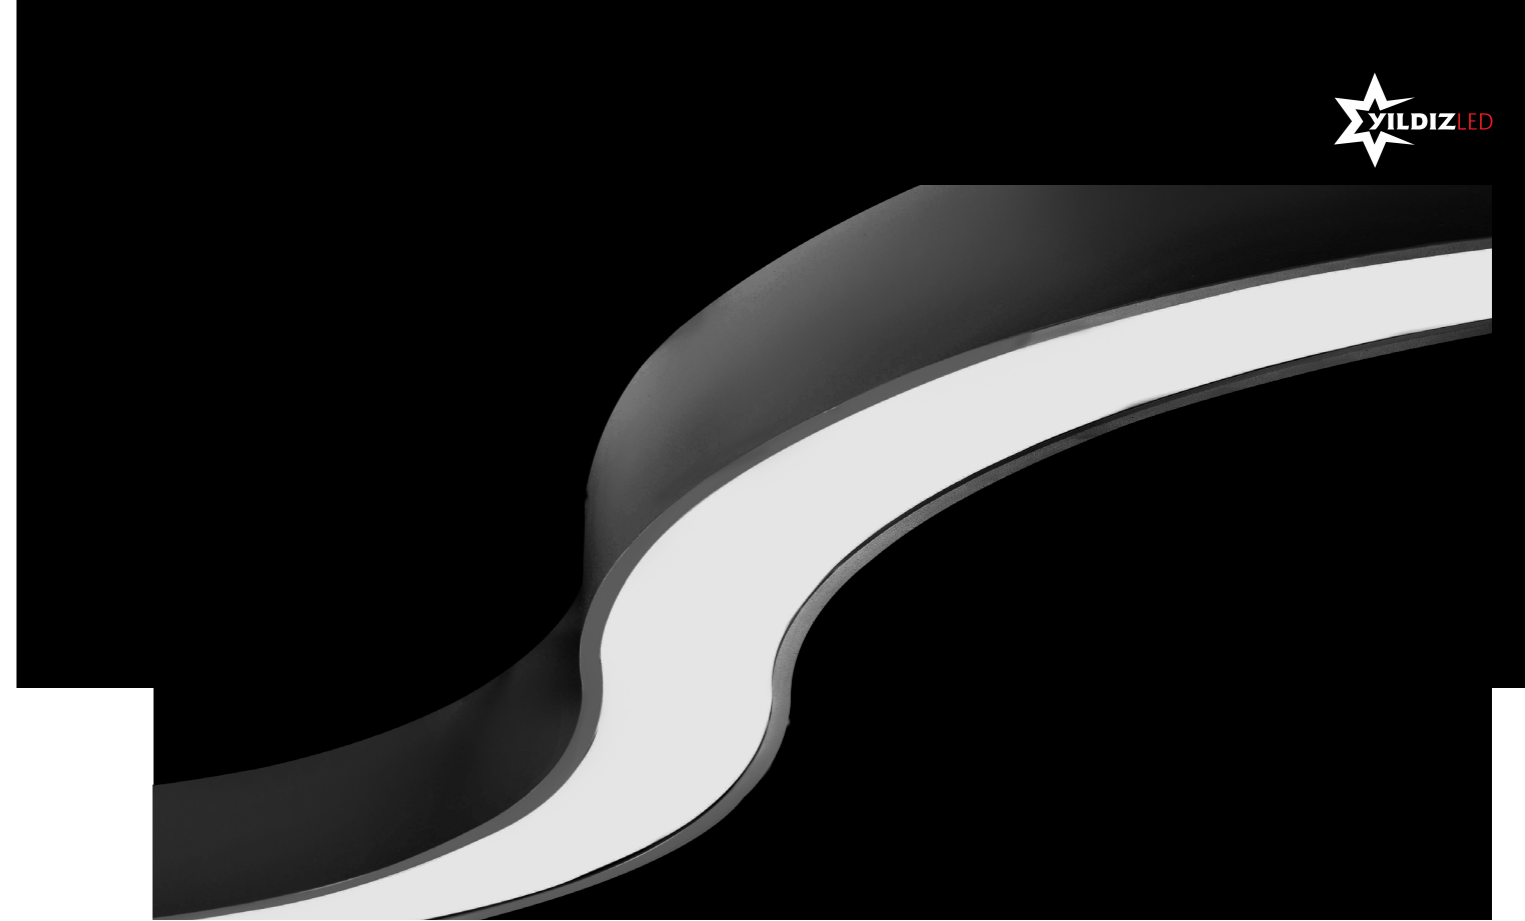


Thabit

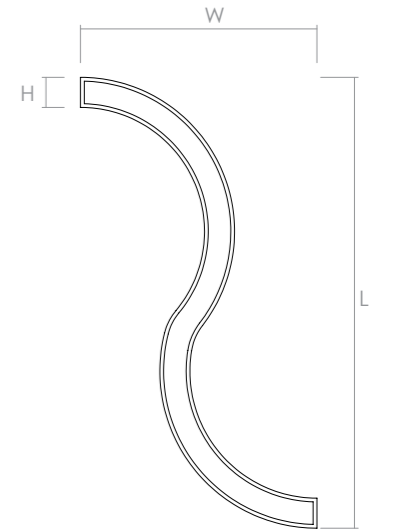

Nominal Voltage 220-240 VAC
Body Materials Aluminum
Optics PMMA Diffuser
Led Options Osram, Seoul, Samsung
Class I
Ingress Protection IP40
Optional Dimmer, DALI, Emergency Kit, Sensor

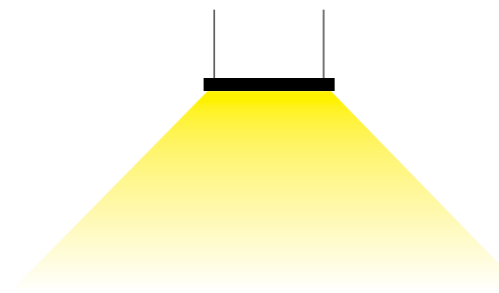

Product Code	Power Consumption (W)	Output Lumen (lm)	Correlated Color Temperature (CCT)	Color Rendering Index (CRI)
YL-SKT-2-35	35	4200	3000K / 4000K / 6500K	Min. 80
YL-SKT-2-45	45	5400	3000K / 4000K / 6500K	Min. 80
YL-SKT-2-50	50	6000	3000K / 4000K / 6500K	Min. 80
YL-SKT-2-65	65	7800	3000K / 4000K / 6500K	Min. 80

Product Code / Dimension (mm)	L	W	H	Weight (gr)
YL-SKT-2-35	1200	600	80	1440
YL-SKT-2-45	1500	750	80	1800
YL-SKT-2-50	1800	900	80	2160
YL-SKT-2-65	2000	1000	80	2400