



Avior



| Product Code | Power Consumption (W) | Output Lumen (lm) | Correlated Color Temperature (CCT) | Color Rendering Index (CRI) |
|--------------|-----------------------|-------------------|------------------------------------|-----------------------------|
| YL-SKT-3-25  | 25                    | 2500              | 3000K / 4000K / 6500K              | Min. 80                     |
| YL-SKT-3-35  | 35                    | 3500              | 3000K / 4000K / 6500K              | Min. 80                     |
| YL-SKT-3-90  | 90                    | 9000              | 3000K / 4000K / 6500K              | Min. 80                     |
| YL-SKT-3-100 | 100                   | 10000             | 3000K / 4000K / 6500K              | Min. 80                     |
| YL-SKT-3-120 | 120                   | 12000             | 3000K / 4000K / 6500K              | Min. 80                     |



|                    |                                     |
|--------------------|-------------------------------------|
| Nominal Voltage    | 220-240 VAC                         |
| Body Materials     | Aluminum                            |
| Optics             | PMMA Diffuser                       |
| Led Options        | Osram, Seul, Samsung                |
| Class              | I                                   |
| Ingress Protection | IP40                                |
| Optional           | Dimmer, DALI, Emergency Kit, Sensor |

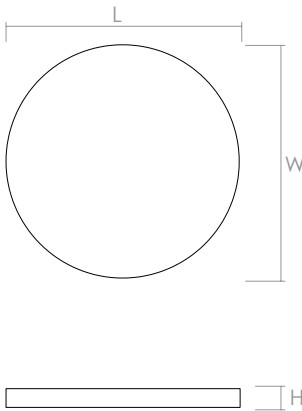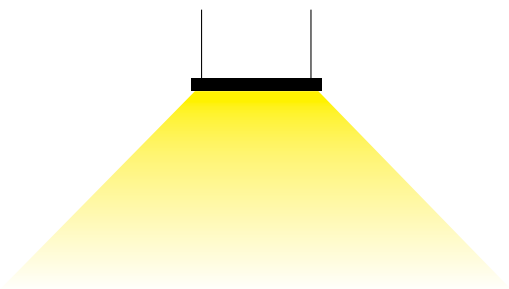

| Product Code / Dimension (mm) | L    | W    | H  | Weight (gr) |
|-------------------------------|------|------|----|-------------|
| YL-SKT-3-25                   | 300  | 300  | 80 | 1440        |
| YL-SKT-3-35                   | 400  | 400  | 80 | 1800        |
| YL-SKT-3-90                   | 600  | 600  | 80 | 2160        |
| YL-SKT-3-100                  | 800  | 800  | 80 | 2400        |
| YL-SKT-3-120                  | 1000 | 1000 | 80 |             |