



**Circular**

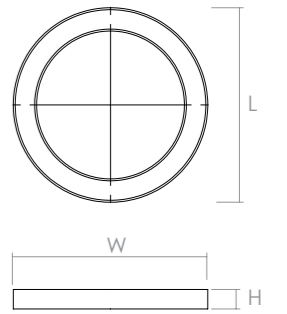

**Nominal Voltage** 220-240 VAC  
**Body Materials** Aluminum  
**Optics** PMMA Diffuser  
**Led Options** Osram, Seoul, Samsung  
**Class** I  
**Ingress Protection** IP40  
**Optional** Dimmer, DALI, Emergency Kit, Sensor

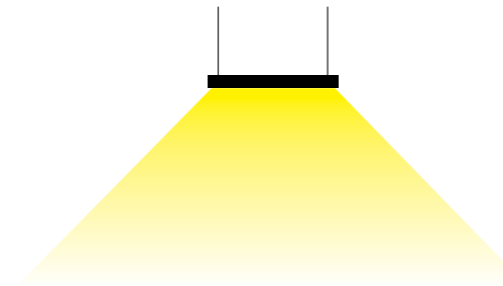

Product Code	Power Consumption (W)	Output Lumen (lm)	Correlated Color Temperature (CCT)	Color Rendering Index (CRI)
YL-STY-01	35	4200	3000K / 4000K / 6500K	Min. 80
YL-STY-02	45	5400	3000K / 4000K / 6500K	Min. 80
YL-STY-03	65	7800	3000K / 4000K / 6500K	Min. 80
YL-STY-04	75	9000	3000K / 4000K / 6500K	Min. 80
YL-STY-05	85	10200	3000K / 4000K / 6500K	Min. 80
YL-STY-06	120	14400	3000K / 4000K / 6500K	Min. 80

Product Code / Dimension (mm)	L	W	H	Weight (gr)
YL-STY-01	500	500	100	750
YL-STY-02	600	600	100	2000
YL-STY-03	800	800	100	3500
YL-STY-04	1000	1000	100	1500
YL-STY-05	1200	1200	100	4500
YL-STY-06	1500	1500	100	3000