




Pollux



Product Code	Power Consumption (W)	Output Lumen (lm)	Correlated Color Temperature (CCT)	Color Rendering Index (CRI)
YL-KNP-100	100-150	125000 - 18750	3000K / 4000K / 6500K	Min. 80
YL-KNP-200	150-200	18750 - 25000	3000K / 4000K / 6500K	Min. 80

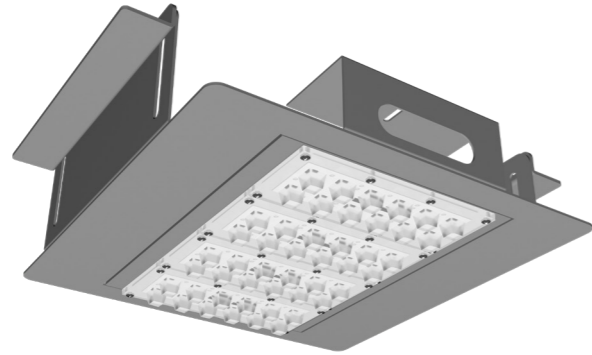

Nominal Voltage 220-240 VAC
Body Materials Sheet Metal
Optics PMMA Injection
Beam Angle Optional
Led Options Osram, Seoul, Cree, Samsung
Class I
Ingress Protection IP67
Optional Dimmer, DALI

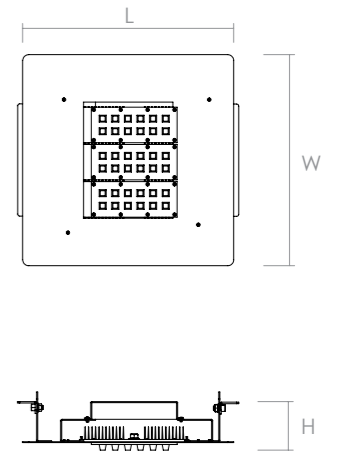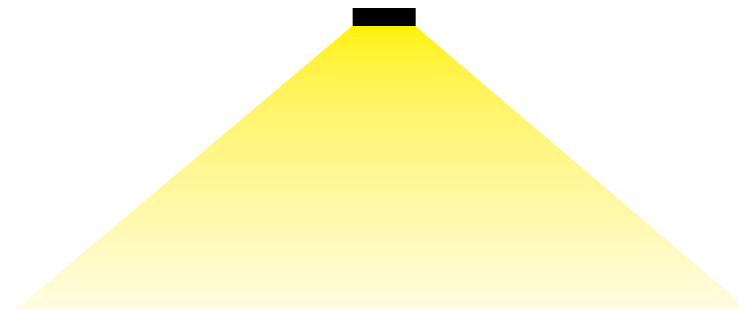

Product Code / Dimensions (mm)	L	W	H	Weight (gr)
YL-KNP-100	375 (Optional)	375 (Optional)	98	4500
YL-KNP-200	425 (Optional)	425 (Optional)	98	5500