



Tucana 2

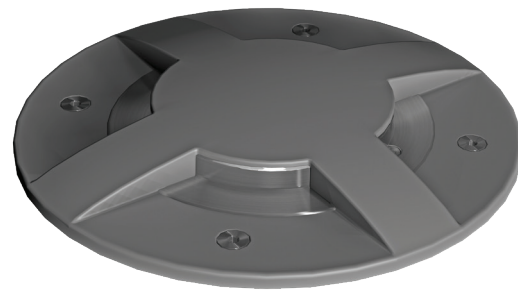

Nominal Voltage	220-240 VAC
Body Materials	Stainless Steel
Optics	PMMA Injection
Led Options	Osram, Seoul, Cree
Class	I
Ingress Protection	IP65 - IP67
Optional	Dimmer, DALI

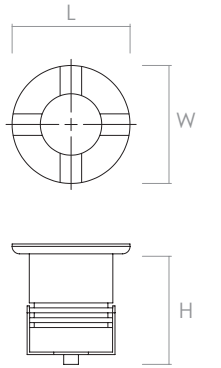

Product Code	Power Consumption (W)	Output Lumen (lm)	Correlated Color Temperature (CCT)	Color Rendering Index (CRI)
YL-G3	3 - 6	270 - 540	3000K / 4000K / 6500K / RGB	Min. 80
YL-G4	6 - 12	540 - 1080	3000K / 4000K / 6500K / RGB	Min. 80

Product Code / Dimensions (mm)	L	W	H	Weight (gr)
YL-G3	48	48	44	700-1350
YL-G4	96	96	80	1400-2000