


Citala



Nominal Voltage 220-240 VAC
Body Materials Aluminum Extrusion Plastic
Optics Injection
Led Options Osram, Seoul, Cree
Ingress Protection IP67
Optional Dimmer, DALI, DMX

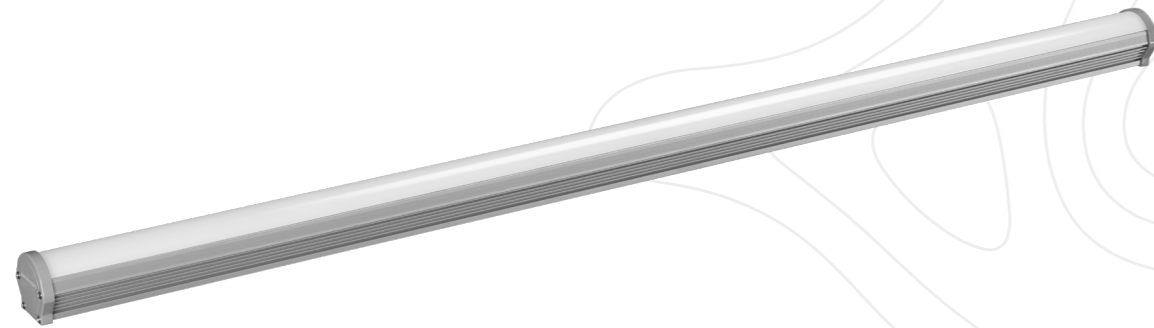

Product Code	Power Consumption (W)	Output Lumen (lm)	Correlated Color Temperature (CCT)	Color Rendering Index (CRI)
YL-AYN-50C	17	2125	3000K / 4000K / 6500K / RGB	Min. 80
YL-AYN-100C	35	4375	3000K / 4000K / 6500K / RGB	Min. 81

Product Code / Dimensions (mm)	L	W	H	Weight (gr)
YL-AYN-50C	500	50	50	350
YL-AYN-100C	1000	50	50	750