

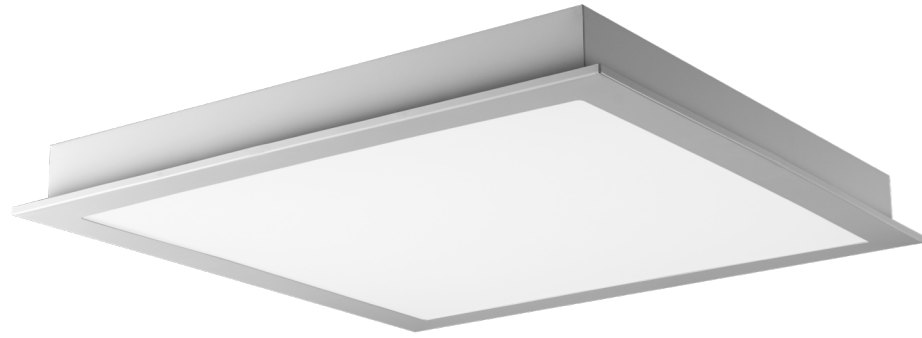


Rigel Series

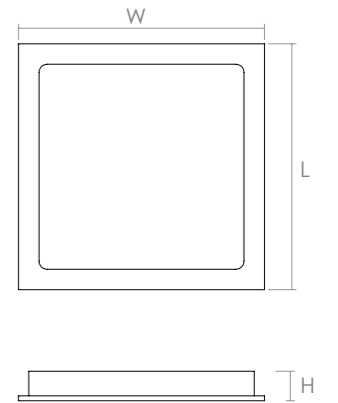

Nominal Voltage 220-240 VAC
Body Materials Sheet Metal
Optics PMMA Diffuser
Led Options Osram, Seul, Samsung
Class I
Ingress Protection IP40 - IP65
Optional Dimmer, DALI, Emergency Kit, Sensor

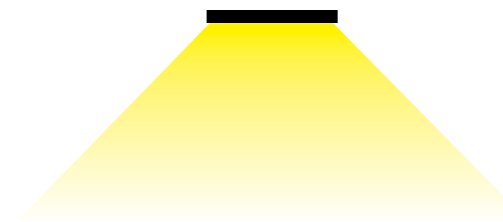

Product Code	Power Consumption (W)	Output Lumen (lm)	Correlated Color Temperature (CCT)	Color Rendering Index (CRI)
LP-17WSA3030	17	2125	3000K / 4000K / 6500K	Min. 80
LP-17WSA3060	17	2125	3000K / 4000K / 6500K	Min. 80
LP-35WSA30120	35	4375	3000K / 4000K / 6500K	Min. 80
LP-35WSA6060	35	4375	3000K / 4000K / 6500K	Min. 80
LP-35WSA60120	70	8750	3000K / 4000K / 6500K	Min. 80

Product Code / Dimension (mm)	L	W	H	Weight (gr)
LP-17WSA3030	292	292	60	1500
LP-17WSA3060	292	592	60	3000
LP-35WSA30120	292	1192	60	4500
LP-35WSA6060	592	592	60	4500
LP-35WSA60120	592	1192	60	8000