



Progyo Series



YILDIZLED



Nominal Voltage 220-240 VAC
Body Materials Sheet Metal
Optics PMMA Diffuser
Led Options Osram, Seoul, Samsung
Class I
Ingress Protection IP40 - IP65
Optional Dimmer, DALI, Emergency Kit, Sensor

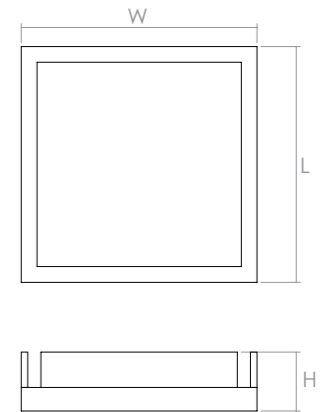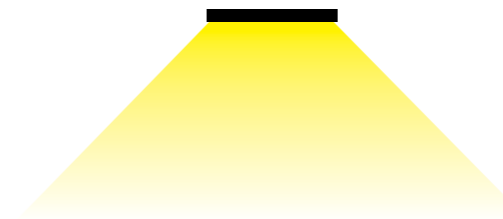

Product Code	Power Consumption (W)	Output Lumen (lm)	Correlated Color Temperature (CCT)	Color Rendering Index (CRI)
LP-17WC3030	17	2125	3000K / 4000K / 6500K	Min. 80
LP-17WC3060	17	2500	3000K / 4000K / 6500K	Min. 80
LP-35WC30120	35	4375	3000K / 4000K / 6500K	Min. 80
LP-35WC6060	35	4375	3000K / 4000K / 6500K	Min. 80
LP-70WC60120	70	8750	3000K / 4000K / 6500K	Min. 80

Product Code / Dimension (mm)	L	W	H	Weight (gr)	Cut Out
LP-17WC3030	300	300	60	1500	280*280
LP-17WC3060	300	600	60	3000	280*580
LP-35WC30120	300	1200	60	4500	280*1180
LP-35WC6060	600	600	60	4500	580*580
LP-70WC60120	600	1200	60	8000	580*1180