



Castor Series

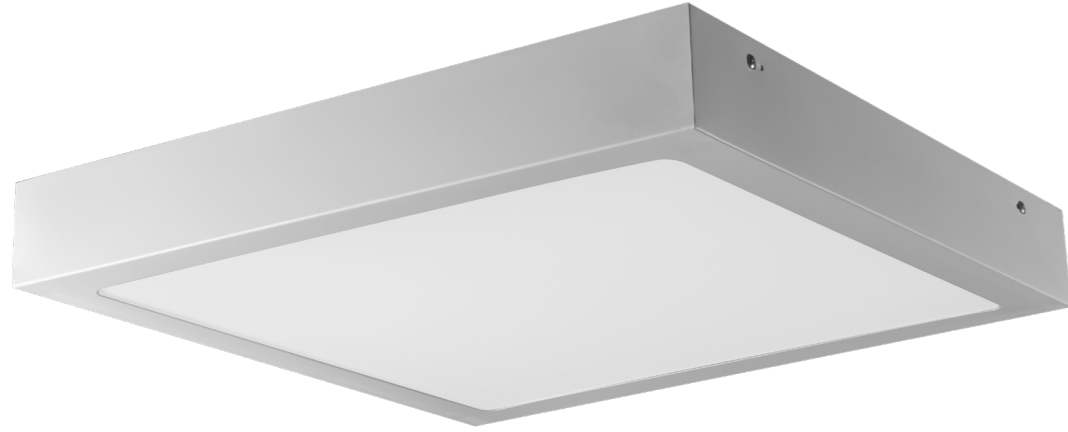

Nominal Voltage 220-240 VAC
Body Materials Sheet Metal
Optics PMMA Diffuser
Led Options Osram, Seoul, Samsung
Class I
Ingress Protection IP40 - IP65
Optional Dimmer, DALI, Emergency Kit, Sensor

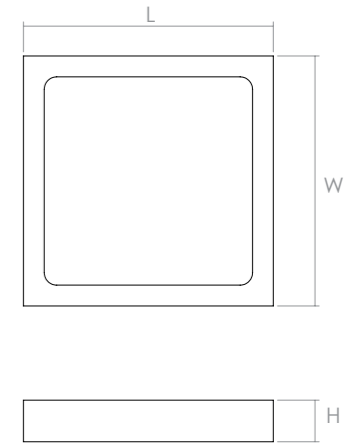

Product Code	Power Consumption (W)	Output Lumen (lm)	Correlated Color Temperature (CCT)	Color Rendering Index (CRI)
LP-5WSU1515	5	625	3000K / 4000K / 6500K	Min. 80
LP-15WSU1560	15	1875	3000K / 4000K / 6500K	Min. 80
LP-17WSU3030	17	2125	3000K / 4000K / 6500K	Min. 80
LP-17WSU3060	17	2500	3000K / 4000K / 6500K	Min. 80
LP-30WSU15120	30	3750	3000K / 4000K / 6500K	Min. 80
LP-35WSU30120	35	4375	3000K / 4000K / 6500K	Min. 80
LP-35WSU16060	35	4375	3000K / 4000K / 6500K	Min. 80
LP-70WSU160120	70	8750	3000K / 4000K / 6500K	Min. 80

Product Code / Dimension (mm)	L	W	H	Weight (gr)
LP-5WSU1515	150	150	60	750
LP-15WSU1560	150	600	60	2000
LP-17WSU3030	300	300	60	1500
LP-17WSU3060	300	600	60	3000
LP-30WSU15120	150	1200	60	3500
LP-35WSU30120	300	1200	60	4500
LP-35WSU16060	600	600	60	4500
LP-70WSU160120	600	1200	60	8000