

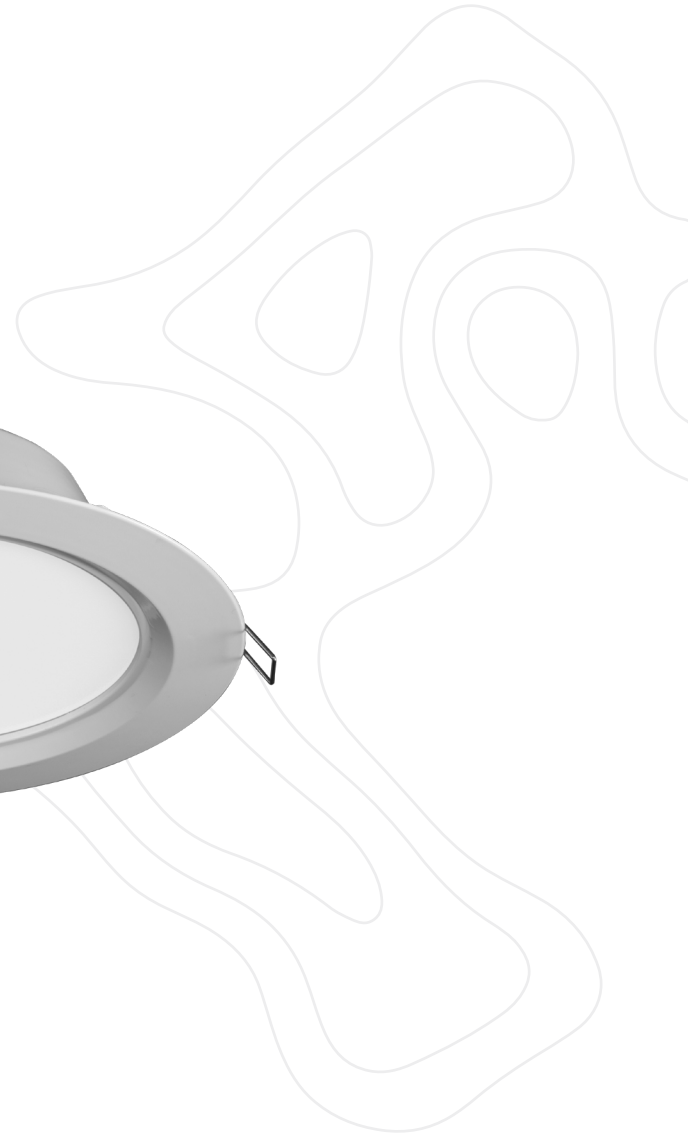


Ares



Nominal Voltage	220-240 VAC
Body Materials	Plastic
Optics	PMMA Diffuser
Led Options	Osram, Seoul, Samsung
Class	II
Ingress Protection	IP40 - IP65
Optional	Dimmer, DALI, Emergency Kit, Seperately Mounted Sensor

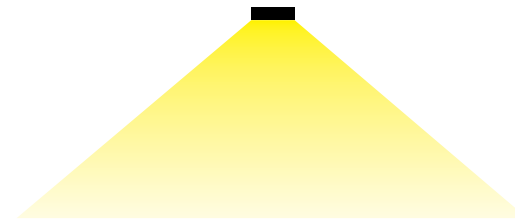

Product Code	Power Consumption (W)	Output Lumen (lm)	Correlated Color Temperature (CCT)	Color Rendering Index (CRI)
YL-SPT-1	8	840	3000K / 4000K / 6500K	Min. 80
YL-SPT-2	10,5	1103	3000K / 4000K / 6500K	Min. 80

Product Code / Dimensions (mm)	L	W	H	Weight (gr)
YL-SPT-1	142	142	54	170
YL-SPT-2	195	195	54	250