



# Alphard



Product Code	Power Consumption (W)	Output Lumen (lm)	Correlated Color Temperature (CCT)	Color Rendering Index (CRI)
YL-SPT-4-6	6	750	3000K / 4000K / 6500K	Min. 80
YL-SPT-4-8	8	1000	3000K / 4000K / 6500K	Min. 80
YL-SPT-4-12	12	1500	3000K / 4000K / 6500K	Min. 80
YL-SPT-4-16	16	2000	3000K / 4000K / 6500K	Min. 80
YL-SPT-4-20	20	2500	3000K / 4000K / 6500K	Min. 80
YL-SPT-4-25	25	3125	3000K / 4000K / 6500K	Min. 80
YL-SPT-4-12D	12	1500	3000K / 4000K / 6500K	Min. 80
YL-SPT-4-16D	16	2000	3000K / 4000K / 6500K	Min. 80
YL-SPT-4-24D	24	3000	3000K / 4000K / 6500K	Min. 80
YL-SPT-4-32D	32	4000	3000K / 4000K / 6500K	Min. 80
YL-SPT-4-40D	40	5000	3000K / 4000K / 6500K	Min. 80



**Nominal Voltage** 220-240 VAC  
**Body Materials** Aluminum  
**Optics** PMMA Diffuser  
**Led Options** Osram, Seoul, Samsung  
**Class** II  
**Ingress Protection** IP40 - IP65  
**Optional** Dimmer, DALI, Emergency Kit, Separately Mounted Sensor

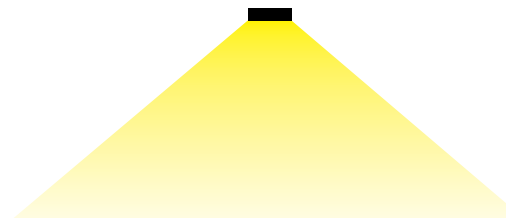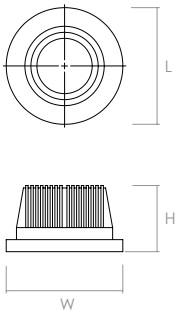

Product Code / Dimension (mm)	L	W	H	Weight (gr)	Cut Out
YL-SPT-4-6	97	97	55	260	85
YL-SPT-4-8	117	117	48	320	105
YL-SPT-4-12	147	147	54	430	130
YL-SPT-4-16	175	175	58	520	160
YL-SPT-4-20	192	192	55	620	175
YL-SPT-4-25	227	227	58	880	210
YL-SPT-4-12D	194	97	55	680	2*85
YL-SPT-4-16D	234	117	48	750	2*105
YL-SPT-4-24D	294	147	54	1100	2*130
YL-SPT-4-32D	350	175	58	1350	2*160
YL-SPT-4-40D	384	192	55	1500	2*175