

## Canopus





lighting  
EXPERIENCE

Product Code	Power Consumption (W)	Output Lumen (lm)	Correlated Color Temperature (CCT)	Color Rendering Index (CRI)
YL-SPT-7-9	9	1125	3000K / 4000K / 6500K	Min. 80
YL-SPT-7-12	12	1500	3000K / 4000K / 6500K	Min. 80
YL-SPT-7-18	18	2250	3000K / 4000K / 6500K	Min. 80
YL-SPT-7-25	25	3125	3000K / 4000K / 6500K	Min. 80



<b>Nominal Voltage</b>	220-240 VAC
<b>Body Materials</b>	Aluminum
<b>Optics</b>	PMMA Diffuser
<b>Led Options</b>	Osram, Cree, Citizen
<b>Class</b>	II
<b>Ingress Protection</b>	IP40 - IP65
<b>Optional</b>	Dimmer, DALI, Emergency Kit, Separately Mounted Sensor

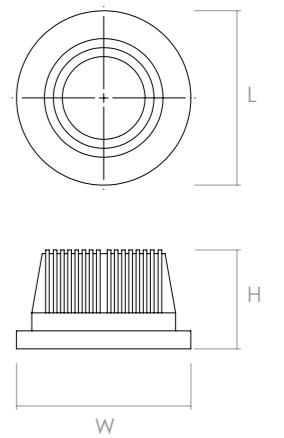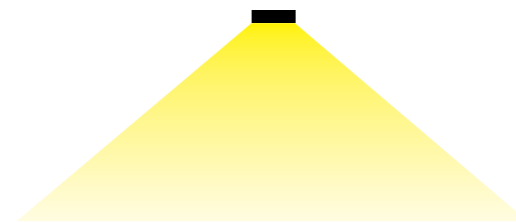

Product Code / Dimension (mm)	L	W	H	Weight (gr)	Cut Out
YL-SPT-7-9	194	97	55	260	85
YL-SPT-7-12	234	117	48	320	105
YL-SPT-7-18	294	147	54	430	130
YL-SPT-7-25	384	192	55	620	175