

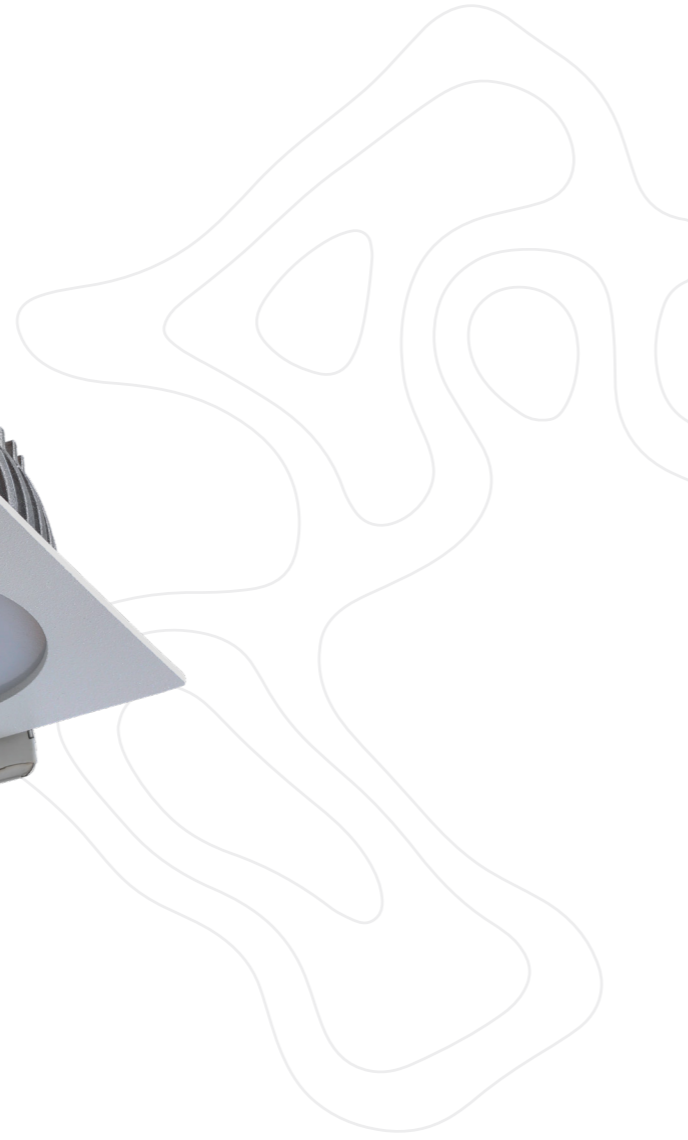


# Anilam

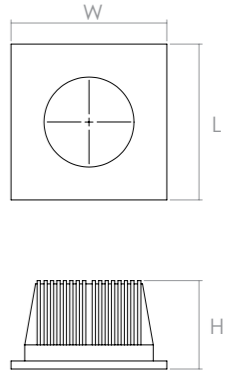

**Nominal Voltage** 220-240 VAC  
**Body Materials** Aluminum  
**Optics** PMMA Diffuser  
**Led Options** Osram, Seul, Samsung  
**Class** II  
**Ingress Protection** IP40 - IP65  
**Optional** Dimmer, DALI, Emergency Kit, Separately Mounted Sensor

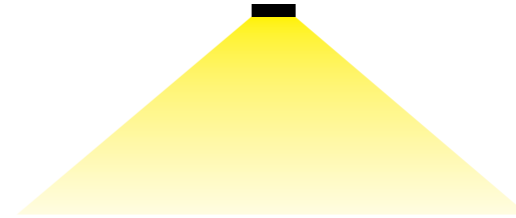

Product Code	Power Consumption (W)	Output Lumen (lm)	Correlated Color Temperature (CCT)	Color Rendering Index (CRI)
YL-SPT-8-6	6	750	3000K / 4000K / 6500K	Min. 80
YL-SPT-8-8	8	1000	3000K / 4000K / 6500K	Min. 80
YL-SPT-8-12	12	1500	3000K / 4000K / 6500K	Min. 80
YL-SPT-8-16	16	2000	3000K / 4000K / 6500K	Min. 80
YL-SPT-8-20	20	2500	3000K / 4000K / 6500K	Min. 80
YL-SPT-8-25	25	3125	3000K / 4000K / 6500K	Min. 80

Product Code / Dimension (mm)	L	W	H	Weight (gr)	Cut Out
YL-SPT-8-6	97	97	55	370	85
YL-SPT-8-8	117	117	48	420	105
YL-SPT-8-12	147	147	54	580	130
YL-SPT-8-16	175	175	58	720	160
YL-SPT-8-20	192	192	55	860	175
YL-SPT-8-25	227	227	58	1200	210