

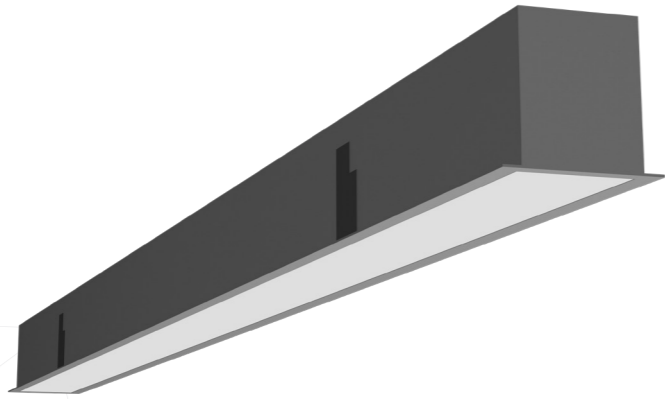


Saiph

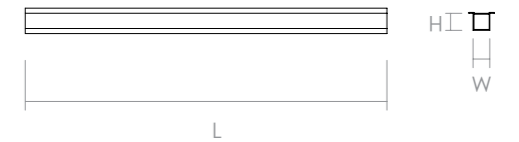

Nominal Voltage	220-240 VAC
Body Materials	Aluminum
Optics	PMMA Diffuser
Led Options	Osram, Seoul, Cree
Class	I
Ingress Protection	IP40 - IP65
Optional	Dimmer, DALI, Emergency Kit, Sensor

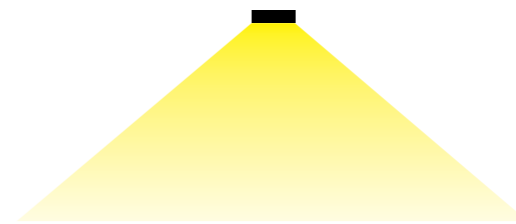

Product Code	Power Consumption (W)	Output Lumen (lm)	Correlated Color Temperature (CCT)	Color Rendering Index (CRI)
YL-RL-1	15W/m	1800lm/m	3000K / 4000K / 6500K	Min. 80
YL-RL-2	25W/m	3000lm/m	3000K / 4000K / 6500K	Min. 80
YL-RL-3	35W/m	4200lm/m	3000K / 4000K / 6500K	Min. 80
YL-RL-4	45W/m	5400lm/m	3000K / 4000K / 6500K	Min. 80
YL-RL-5	55-75W/m	6600-9000lm/m	3000K / 4000K / 6500K	Min. 80

Product Code / Dimension (mm)	L	W	H	Weight (gr)
YL-RL-1	Optional	55	40	680
YL-RL-2	Optional	75	40	750
YL-RL-3	Optional	110	75	1100
YL-RL-4	Optional	82	65	1350
YL-RL-5	Optional	70	70	1500