


Ela L



Nominal Voltage	220-240 VAC
Body Materials	Aluminum Injection
Optics	Tempered Glass
Beam Angle	Optional
Led Options	Osram, Seoul, Cree, Samsung
Class	I
Ingress Protection	IP66
Optional	Dimmer, DALI, Emergency Kit, Sensor

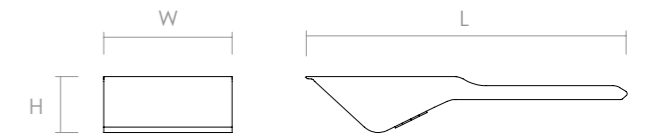

Product Code	Power Consumption (W)	Output Lumen (lm)	Correlated Color Temperature (CCT)	Color Rendering Index (CRI)
YLSE-XXX	30-160	3750-20000	3000K / 4000K / 6500K	Min. 80

Product Code / Dimensions (mm)	L	W	H	Weight (gr)
YLSE-XXX	623	250	110	8820