

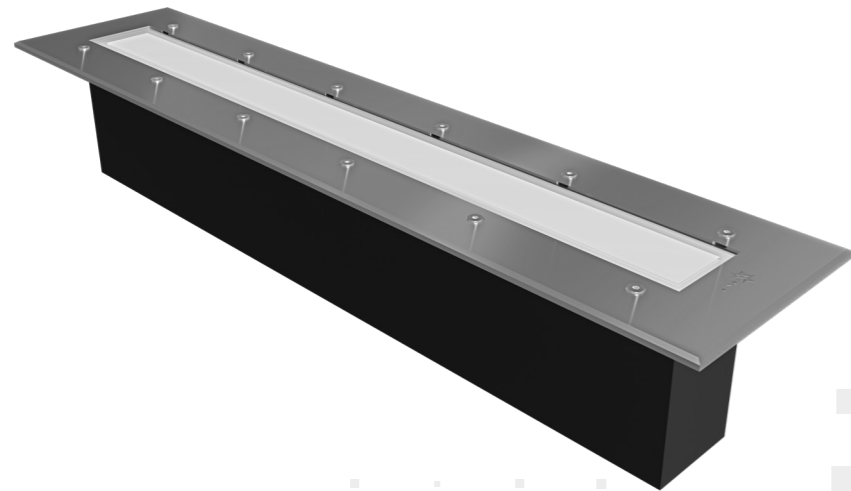


Taurus

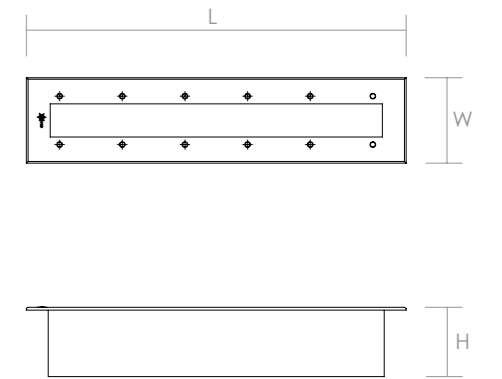

- Nominal Voltage** 220-240 VAC
- Body Materials** Stainless Steel with housing box
- Optics** Tempered Glass
- Beam Angle** Optional
- Led Options** Osram, Seoul, Nichia, Cree
- Class** I
- Ingress Protection** IP65 - IP67
- Optional** Dimmer, DALI, DMX

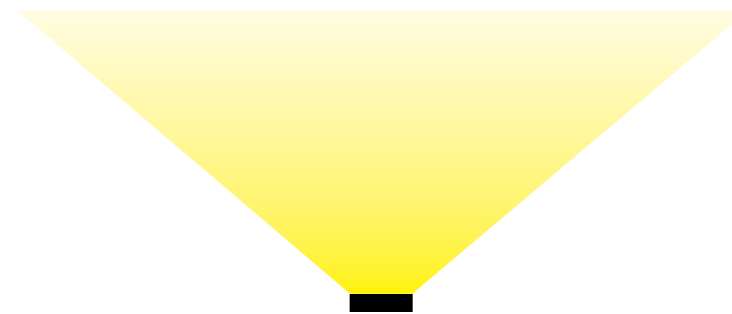

Product Code	Power Consumption (W)	Output Lumen (lm)	Correlated Color Temperature (CCT)	Color Rendering Index (CRI)
YL-GM-09	9-24	1125-2880	3000K / 4000K / 6500K / RGB	Min. 80
YL-GM-18	24-36	2880-4500	3000K / 4000K / 6500K / RGB	Min. 80

Product Code / Dimensions (mm)	L	W	H	Weight (gr)
YL-GM-09	400	90	70	4500
YL-GM-18	400	160	90	6000