

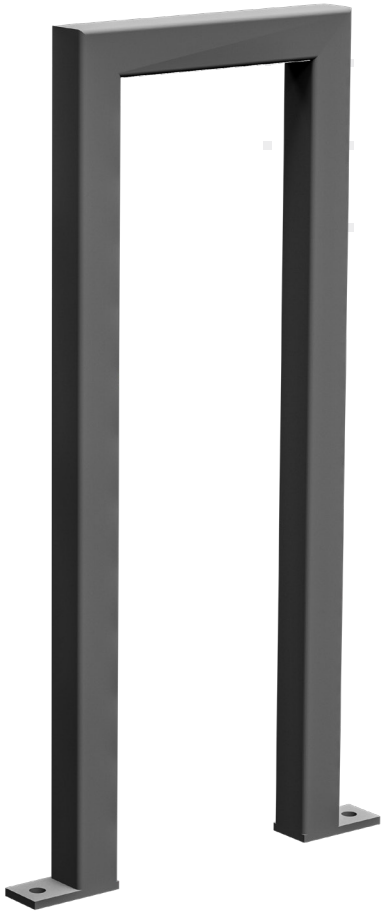


Girtab

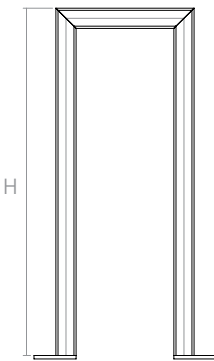

Nominal Voltage 220-240 VAC
Body Materials Aluminum or Steel Profile
Optics PMMA Diffuser
Led Options Osram, Seoul, Cree
Class I
Ingress Protection IP65



Product Code	Power Consumption (W)	Output Lumen (lm)	Correlated Color Temperature (CCT)	Color Rendering Index (CRI)
YL-BLD-01	10	1200	3000K / 4000K / 6500K	Min. 80

Product Code / Dimensions (mm)	L	W	H	Weight (gr)
YL-BLD-01	540	30	1000 (Optional)	5000